



# EVC910 10-site MCU

## Full HD Video Conferencing System

AVer's EVC910 is the perfect video conferencing solution for large conference rooms and auditoriums. It provides a cost-effective way for businesses to connect up to 10 sites and enjoy full HD video and content sharing, offering an unbeatable return on investment. Users can connect to EVC910 calls from PCs, laptops, tablets and mobile phones via AVer's EZMeetup software. Moreover, by using the EVC910 with AVer's EZDraw collaborative annotation app users can access to an impressive array of interactive tools. The EVC910 is simple to set up, easy to operate and offers great interoperability across all brands.



### 10 points embedded MCU

The EVC910 supports conferencing between up to 10 different locations at full HD 1080p resolution. This cost-effective embedded MCU provides smooth video streaming and is ideal for businesses that need high quality communication between multiple locations.



18X  
total zoom


### PTZ camera with 18X total zoom

The EVC910's powerful full HD PTZ camera offers 18X zoom, as well as +/-130° pan and +90°/-25° tilt, quick auto-focus and clear close-ups of participants, making it ideal for large conference rooms.



### Voice activated layout switch

The EVC910's voice activated layout switch automatically enlarges the dominant speakers' image, making conferences more natural by clearly showing who has the floor and ensuring participants do not inadvertently interrupt each other.



### One-touch recording

EVC910 video conferences can be recorded directly to a USB flash drive, including video, audio and shared content and regardless of whether the EVC910 is connected or offline, making keeping records of conferences supremely simple. Recorded conferences can be played back using an EVC910, or on PCs or laptops using AVer's VCPlayer software.



### Break Your Communication Barriers with Simultaneous Skype for Business, H.323, and SIP Support

Prepare your video conferencing experience for Tri-Protocol Integration for the AVer EVC Series! Get exclusive Multipoint connections between three protocols and expand your global communication capabilities. (License upgrade required)



### Connect anywhere & anyplace

The EVC910 can connect up to 10 sites no matter where they are. AVer's mobility software EZMeetup makes possible video conferencing on PCs, laptops, mobile phones and tablets, so users can ensure all participants can join in important conferences with smooth video and clear audio no matter where they are.

# EVC910 10-site MCU

## Full HD Video Conferencing System

### Product specifications

#### Package contents

- Main system unit (codec)
- The New eCam PTZ camera
- EVC microphone array
- IR remote control
- Power supply
- Cables
- Warranty card
- Quick guide

#### Communications

- H.323, SIP standards, SIP TLS
- 64Kbps~4Mbps
- RJ45 network LAN (10/100/1000)
- Manual bandwidth settings

#### Camera

- The New eCam PTZ:
  - pan/tilt/zoom camera
  - 2-megapixel CMOS sensor
  - 18X total zoom
  - ±130° pan; +90°/-25° tilt
  - 72° FOV (H); 43° FOV (V); 82° FOV (D)

#### People video resolutions

- HD1080p (1920 x 1080)
- HD720p (1280 x 720)
- 480p (848 x 480)
- 4CIF (704 x 576)
- CIF (352 x 288)
- SIF (352 x 240)
- All resolutions at 30fps

#### Content video resolutions

- Supported resolutions:
  - HD1080p (1920 x 1080)
  - WSXGA+ (1680 x 1050)
  - SXGA (1280 x 1024)
  - WXGA (1280 x 768)
  - HD720p (1280 x 720)
  - XGA (1024 x 768)
  - SVGA (800 x 600)
  - D1 (720 x 480)
  - VGA (640 x 480)
- Output resolutions:
  - HD1080p (1920 x 1080) up to 30fps

#### Video standards

- H.264, H.264 HP, H.264 SVC, H.263+, H.263, H.261
- H.239 dual video streams
- BFCP content sharing

#### Video features

- 3D Denoise

#### Video inputs

- The New eCam PTZ
- VGA
- DVI (HDMI)

#### Video outputs

- HDMI
- VGA

#### Audio standards

- G.711, G.722, G.722.1, G.728, G.722.1C, AAC-LD

#### Audio features

- Automatic gain control (AGC)
- Advanced noise reduction
- Acoustic echo cancellation (AEC)

#### Audio inputs

- EVC microphone daisy chain up to 4
- DVI (HDMI)
- Line-in (3.5 mm)

#### Audio outputs

- HDMI
- Line-out (3.5 mm)

#### Other supported standards

- H.224, H.225, H.245, H.281, H.323 Annex Q, H.460, SRTP

#### User interface

- Multiple layout styles
- User-friendly OSD (23 supported languages: English, Traditional Chinese, Simplified Chinese, Czech, Danish, Dutch, Finnish, French, German, Hungarian, Italian, Japanese, Korean, Norwegian, Polish, Portuguese-Brazil, Romanian, Russian, Spanish, Swedish, Thai, Turkish, Vietnamese)

- Display/edit site name

#### Network

- 10/100/1000Mbps
- NAT/firewall traversal
- High Efficiency Lost Packet Recovery (HELPER™)
- API support via Telnet
- Wake-on-LAN (WOL) support
- IPv4 and IPv6 support
- Network Test
- QoS

#### Security

- AES (Advanced Encryption Standard) function (128-bit)
- Password protection for system settings
- Password protection for remote system management

#### Web management tool

- Remote management
- Live monitoring
- Firmware update
- Phonebook download/upload/edit
- Restore system settings
- Export call history

#### Value-added features

- Meeting recording
  - In meeting and offline recording
  - Save directly to USB flash drive
  - Supports screen re-layout during playback
  - Playback and file conversion via VCPlayer software (.mov/.mp4 format)
- Speed dialing via hot keys (10 sets)
- Camera presets (100 positions)
- Network Time Protocol (NTP)
- ScreenShare support
- VCLink support
- SnapShot support
- Group Calling
- Supports SIP voice calls

#### Power supply

- AC 100V~240V, 50/60Hz
- Consumption: EIAJ 12V, 5A

#### Environmental data

- Operation temperature: 0~40°C
- Operation humidity: 20%~80%
- Storage temperature: -20~60°C
- Storage humidity: 20%~80%

#### Physical characteristics

- Package dimensions: 376 x 300 x 243 mm
- Package weight: 6.99kg (15.41lbs)
- Main system (codec): 320 x 262.7 x 37.2 mm
- The New eCam PTZ: 180 x 144 x 184 mm
- EVC microphone array: 131.9 x 118.6 x 25.5 mm

#### Mobility software - EZMeetup

- Support Windows®, Mac®, iOS and Android devices
- 30-day free trial for licensed PC version
- Connect with H.264 video codec
- Receive resolution up to full HD 1080p 30fps
- Transmit resolution up to full HD 1080p 30fps
- Compatible with EVC multipoints
- Support content sharing, capture and recording

#### Collaborative software - EZDraw

- Compatible with EVC multipoints
- Import .JPG, .PNG, .GIF and .BMP files
- Export .PNG files
- A maximum of 10 tablets can be connected

#### Optional Software

- Skype for Business and Lync integration

#### Warranty

- 3+2 year standard warranty\*

#### Optional accessories




microphone

camera mount

\* Please register online to receive free 2 year warranty extension. For detailed warranty information, please contact an AVer representative.

### Hardware specifications

#### Front panel

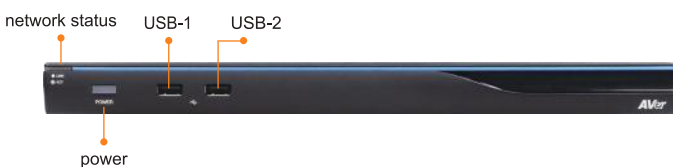

#### Back panel



© 2018 AVer Information Inc. All rights reserved.  
All rights of this object belong to AVer Information Inc. Reproduced or transmitted in any form or by any means without the prior written permission of AVer Information Inc. is prohibited. All information or specifications are subject to change without prior notice. "AVer" is a trademark owned by AVer Information Inc. Other trademarks used herein for description purpose only belong to each of their companies. (201809)

Distributor/Dealer: